
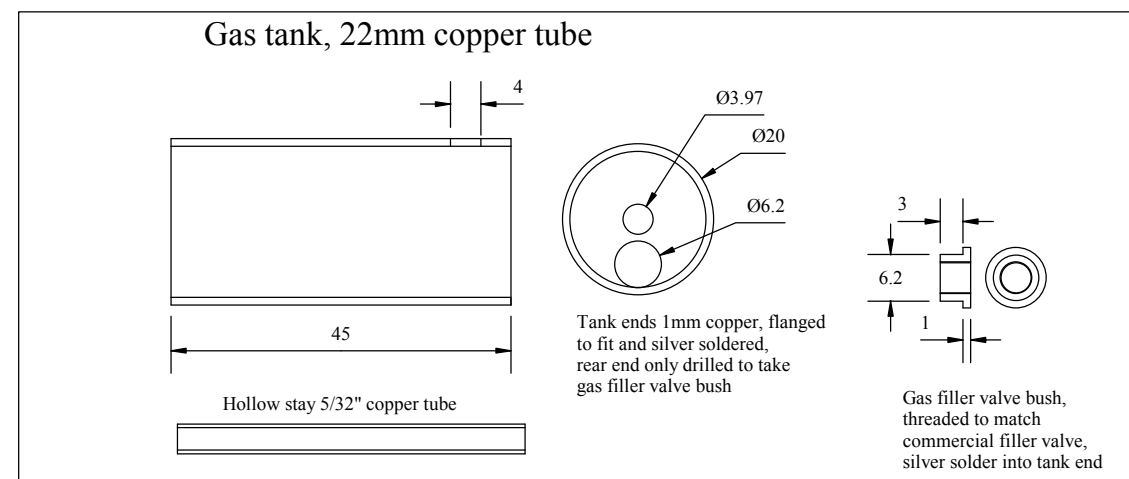
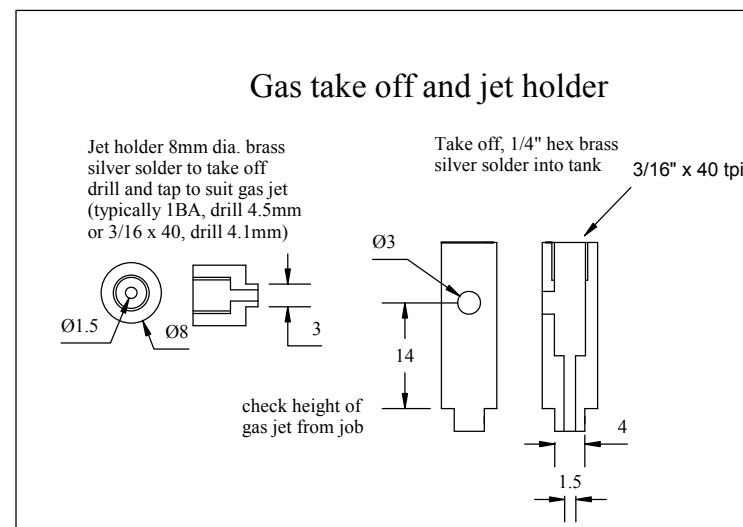
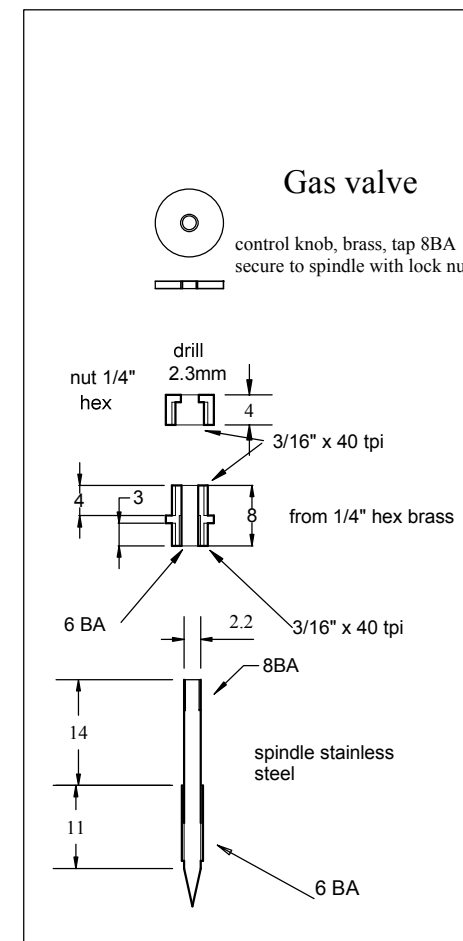


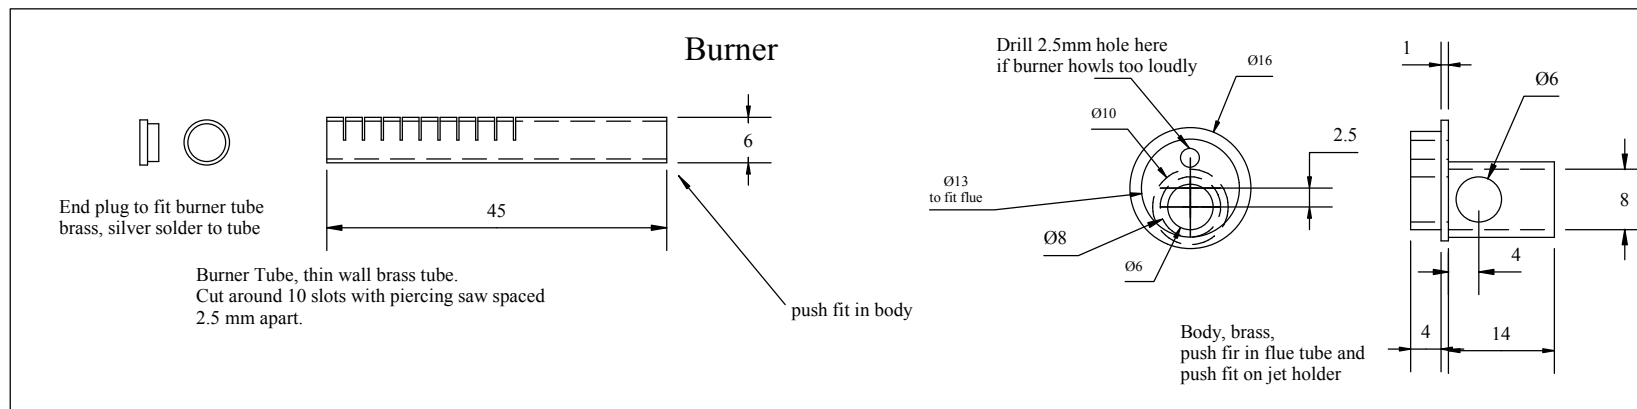

Tanks is secured by 1/16" rod,
through hollow stay.
Tank fits between rear buffer beam and
frame stay behind rear wheels.
Rod is threaded 10BA at each end.

Bagnall Brick 210/1879
16mm scale,
modified to 32mm gauge

Gas tank, control valve and burner

Copyright Dave Watkins 21/2/2011