



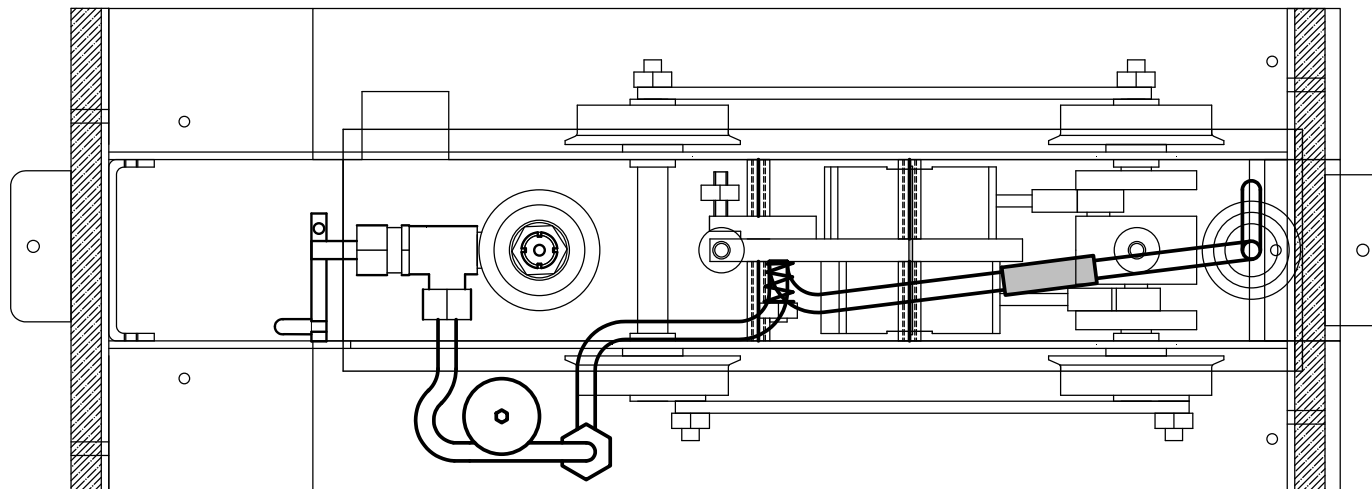


Steam and exhaust pipes are 3/32" copper tube.

Steam pipe is sealed to the regulator by an 'O' ring. It is silver soldered into the side of the lubricator and continues to a 3/16" x 40 TPI pipe union. Steam pipe from this union to engine port block is soft soldered into the port block.

Similarly the exhaust pipe is soft soldered into the engine port block. It is joined to the blast pipe by a sleeve cut from silicon rubber tube.

The blast pipe is bent to clear the hot gases from the flue. It is left loose in the chimney

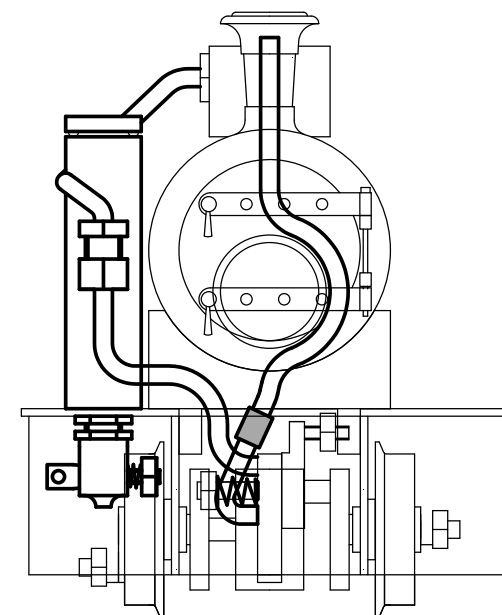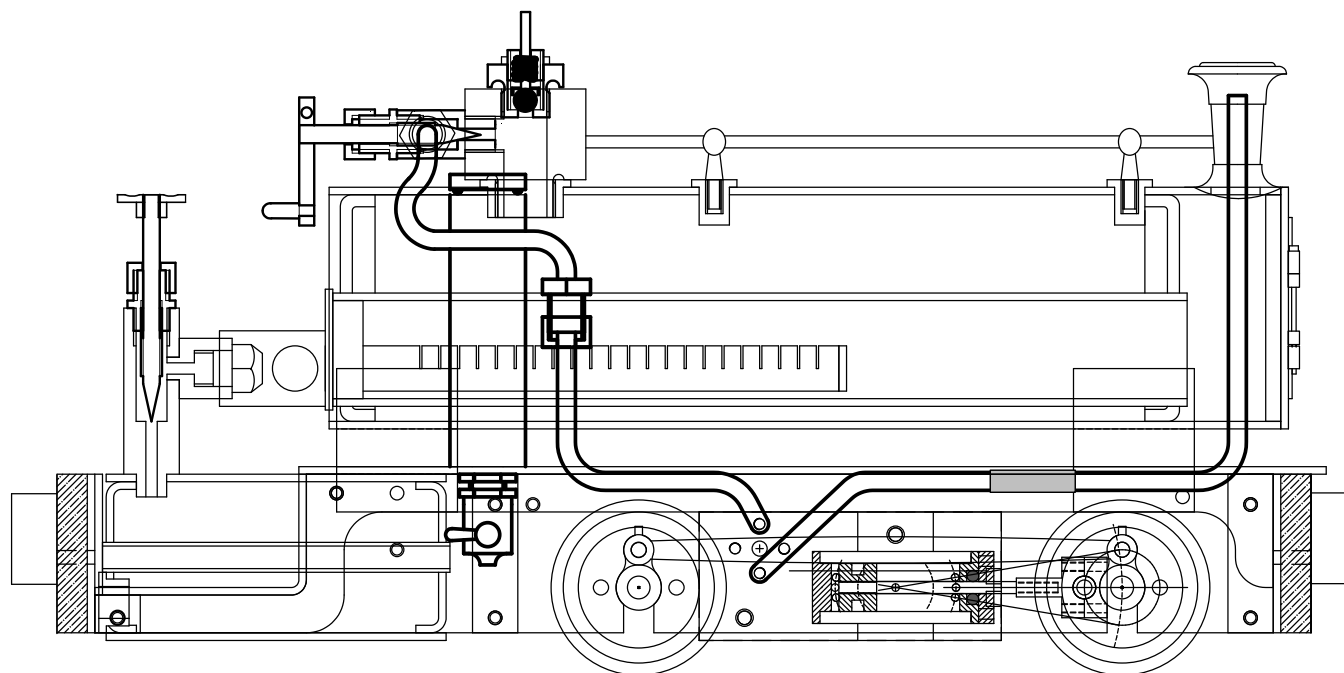

Model based on
Bagnall Brick 210/1879
16mm scale,
modified to 32mm gauge

Pipe Layout

Copyright Dave Watkins 17/12/2010